



Flex 6036

Technical specifications

› **Structure**

- Made of tube and steel plate arc welding with continuous wire.

› **Polyurethane foam**

- Seat density: 60-65Kg/m³.
- Backrest density: 50-55Kg/m³.

› **Upholstery**

- Reaction to fire standards:
 - Spain: UNE-EN 1021 Parts 1 and 2.
 - France: NF D 60-013.
 - Italy: UNI 9175 Class 1.IM.
 - Germany: DIN 66084.
 - USA: CAL TB117.

› **Paint**

- Electrostatic powder polyester paint.
- Paint Thickness: 70-80 microns.
- Grid adhesion according to UNE-EN ISO 2409 : 100%.

› **Fire resistance**

- BS 5852. Clause12. Ignition sources 0,1 and 5. (with approved fabric).
- USA:CAL T.B. 133 (with approved fabric).



› **Resistance and durability classification**

- UNE-EN 12727 Level 4 (Severe use).

› **Ergonomics and Comfort** 

- Armchair tested by the IBV (Biomechanics Institute of Valencia)

General dimensions

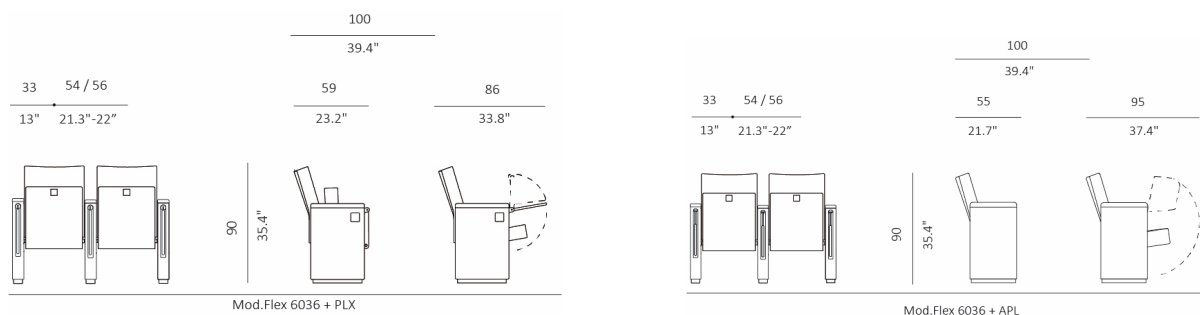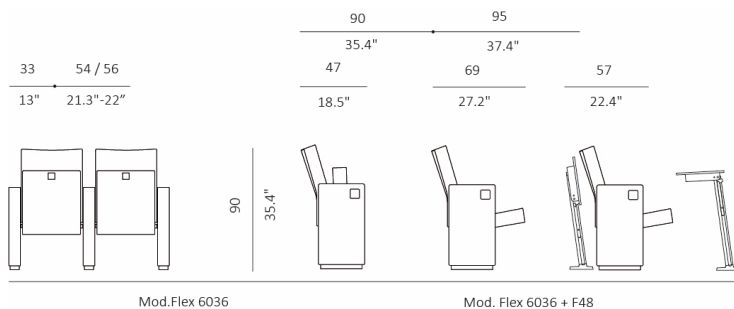

However, for the purpose of facilitating to the customer the latest novelties, FIGUERAS reserves the right to introduce the modifications and variations that it considers most appropriate and suitable for marketing its products.

However, for the purpose of facilitating to the customer the latest novelties, FIGUERAS reserves the right to introduce the modifications and variations that it considers most appropriate and suitable for marketing its products.

General description


- Highly comfortable seat, fully upholstered, with a design that highlights its geometric and simple forms.
- Folding seat, with lateral sides for fixation to the floor or platform. They are normally distributed in rows, sharing the sides, except on the extremes of the row.



- It provides great durability, as the seat consists of a single block of cold-molded polyurethane foam that completely covers a metal structure, consisting of a curved tube frame, a weft of flat springs and articulation pivots for rotation.
- The block is covered with an easily interchangeable upholstery cover, with a zipper system. The backrest has the same characteristics. The side, all the way to the floor, acts as an armrest and is always fully upholstered.
- The automatic return of the seat is carried out by means of a double ball-and-socket joint system with springs and with an integrated Soft System that avoids noise or annoying blows when the seat is returned to its resting position.
- The side panels end in a lower steel base, by which the seat is fixed to the floor with the appropriate anchoring depending on the surface.
- Reaction to fire: This product complies with international regulations.

Product details

- Seat pan and backrest with metal frame and molded foam. The molded foam keeps shape and volume longer than cut foam.
- Slow and silent return of the seat by means of the Soft System.

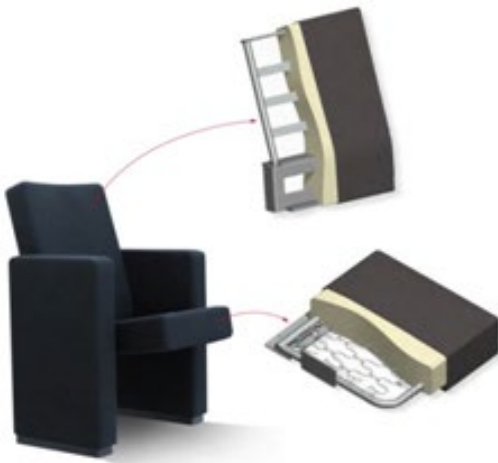

- Backrest with ergonomic form to have good lumbar support.
- Seat pan with foam for comfort and metal frame for durability.



- A mix of rigidity and stability thanks to the solid link between seats.



However, for the purpose of facilitating to the customer the latest novelties, FIGUERAS reserves the right to introduce the modifications and variations that it considers most appropriate and suitable for marketing its products.

| Options



Wooden backrest, seat and/or side panels



| Accessories and solutions for projects



PLX



APL



Optionally, a power socket or USB connections can be integrated



Flex 6036 + F48 Table



Flex 6036 + F1000 Table

However, for the purpose of facilitating to the customer the latest novelties, FIGUERAS reserves the right to introduce the modifications and variations that it considers most appropriate and suitable for marketing its products.

Materials and finishes

› Metal Parts Features

- The steel complies with the following European standards:
 - Tube up to 2mm thick: Alloy designation according to UNE-EN 10305 part 3: E-220.
 - Tube more than 2 mm thick: Alloy designation S275JR.
 - Plate: alloy designation according to EN 10111: DD12.

› Protection and Paint of Metal Parts


- Prior to powder coating, metal parts are treated with a three stage, non-acidic cleaning process to achieve superior finish adhesion. The finishing of the thermosetting polyester powder coating must be applied by electrostatic means with a minimum thickness of 70-80microns.
 - After coating, the parts must be oven cured to create a durable finishing that meets the following requirements:
 - Composition: Polyester powder suitable for outdoor use.
 - Cross Cut Test Adhesion according to UNE-EN ISO 2409 classification GT 0-1.
 - Scratch resistance according to ISO 15184:98 Level HB-H.
 - Total thickness: 70-80Microns.
 - Rust resistance (NSS), according to ISO 9220: 200 h.
 - Resistance to MEK 50 double rubs without paint stripping.

› Seat and Backrest Cushions Features

- The seat and backrest cushions are made of cold moulded polyurethane foam.
 - In the inside, both include metallic tube structures and steel plates, with springs. This system guarantees great comfort and avoids the appearance of deformations in the foams, even after an intensive use.
 - The upholstery of the cushions and the headrest can be handcrafted, allowing all types of upholstery: fabrics, similar leather or natural leather, within the range of products approved by Figueras.
 - This allows the seat to be customized according to each project's requirements.
 - Optionally, a fire barrier can be incorporated between the upholstery and the PUR foam.
 - They comply with all international fire behaviour requirements.
 - Seat foam density 60-65 kg/m³.
 - Backrest foam density 50-55Kg/m³.

› Upholstery

• Group A:
Figueras Fabrics ®

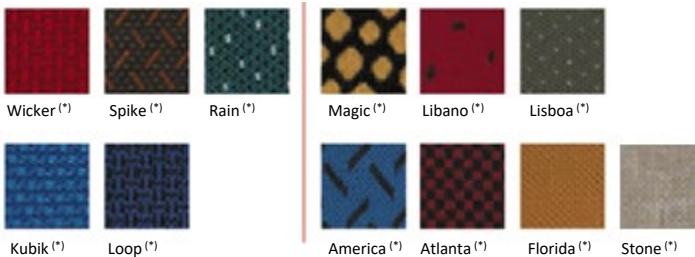

• Group B:



• Group V:



• Group L:



(*) Fabric sample/printed by collection. Check available colours.

› Finishes for wooden parts



Ask our team for further available options